

New Technologies New Materials New Processes New Standards

- Cooperation
- Innovation
- Win-win



Zhongshan Haoyue Metal Technology Co., Ltd

☎ Tel: +86-760-89998182

📍 Add: No.20 Songde Road, Shangnan Industrial Zone, Fusha Town, Zhongshan City, China

CJHYUE®
Haoyue Metal



HAOYUE METAL Brand Ambassador
World Dragon Boat Champion Liu Xuelian

Focus Achieves Perfection
Sincerity Crafts Excellence

Customizable Non-standard Products ➡

Zhongshan Haoyue Metal Technology Co., Ltd

—— Haoyue Dedicated to Precision Hardware · Craftsmanship Forges a Solid Future ——

- Innovation
- Efficiency
- Integrity
- Win-Win

Service, Quality, Innovation.
High Cost-Performance
is the unceasing pursuit
of Haoyue people!

01

About Us



Company Profile >>>

Zhongshan Haoyue Metal Technology Co., Ltd. is located in Fusha Town, Zhongshan City, the renowned hometown of hardware, furniture, and household appliances in China. We specialize in the production and customization of metal products such as hardware hinges and slides. Currently, we cooperate with several top-tier well-known domestic listed brands. We are a comprehensive enterprise integrating development, production, and sales.

The company has always adhered to the philosophy of 'Focus Achieves Perfection,' positioned with precision craftsmanship, and centered on customer service. We optimize the overall allocation of the enterprise and are fully committed to creating the most professional series of metal products, including hardware hinges and slides.

Since its inception, the company has consistently won wide recognition from customers through superior product quality and integrity, gradually forming a sales network that covers the entire country. We advocate a business philosophy guided by technological innovation, centered on efficient management, and driven by marketing. We continuously develop product series that cater to market demands and lead consumer trends. By persistently implementing standardized management models, we strengthen the quality awareness of every employee, improve efficiency, and reduce costs, granting us extreme competitiveness in the market and creating greater profit margins for consumers. With accurate market positioning and precise marketing strategies, we collaborate closely with customers nationwide to jointly develop the market and share the abundant returns brought by market prosperity.

We are willing to cooperate sincerely with new and old customers at home and abroad based on high-quality products, the most reasonable prices, and superior services, on the foundation of mutual benefit, to develop together and achieve a win-win situation across all dimensions.

Butterfly Type Silent Hydraulic Hinge Series



HY-Z Butterfly Type Silent Hydraulic Hinge - Electrophoretic Black (EB)

Material: Space Aluminum, Stainless Steel
Finish: Electrophoretic Black (EB)



HY-Z Butterfly Type Silent Hydraulic Hinge - Gold Plated (GP)

Material: Space Aluminum, Stainless Steel
Finish: Gold Plated (GP)



HY-Z Butterfly Type Silent Hydraulic Hinge - Satin Chrome (SC)

Material: Space Aluminum, Stainless Steel
Finish: Satin Chrome (SC)


Key Features

Specifications	4 Inch	5 Inch
Model: HY-Z Series	HY-Z-435	5 Inch
Max Load Capacity	≤20kg/pcs	≤30kg/pcs
Service Life	More than 300,000 cycles	More than 500,000 cycles
Overall Dimensions	141x94xΦ22.5 Leaf: 130x35x3.5mm	148x100xΦ26 Leaf: 138x36x3.5mm
Grooving Method	Groove-free	
Opening Direction	Single-direction opening, max opening angle 170°, left-hand and right-hand mounting options available	
Operating Temperature	Temperature range: -30℃ ~ 60℃	
Applicable Door Types	Fire doors, wooden doors, aluminum alloy doors—interior doors for hotels, KTVs offices, and homes.	
Notes	Stainless steel hinge leaf thickness: 3mm	
Speed Control	Infinitely adjustable closing force; switchable silent & latching-on functions	
Functions	Hydraulic damping with three-speed cushioning that absorbs impact. Optional free-stop positioning at any angle beyond 90°, and optional 180° fully automatic closing function	

Optional Functions

- ① Position-Hold & Latching
- ② Position-Hold & Soft close
- ③ Self-Closing & Latching
- ④ Self-Closing & Soft close

Installation Position

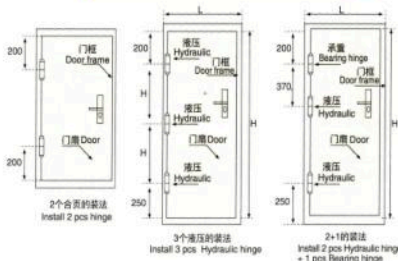

Soften collisions with hydraulic buffering
rely on the butterfly design for stable load-bearing
and enjoy a comfortable living space in silence



Exquisite Craftsmanship



Precision Structure



Convenient Installation



Strong Load-bearing



Soft Close

HY-Q Flag Type Silent Hydraulic Hinge - Brushed Natural (BN)	HY-Q Flag Type Silent Hydraulic Hinge - Electrophoretic Black (EB)	HY-Q Flag Type Silent Hydraulic Hinge - Gold Plated (GP)	HY-Q Flag Type Silent Hydraulic Hinge - Satin Chrome (SC)	HY-Q Flag Type Silent Hydraulic Hinge - Antique Bronze	HY-Q Flag Type Silent Hydraulic Hinge - Antique Copper
Material: SUS304 Stainless Steel Finish: Brushed Natural (BN)	Material: Space Aluminum Finish: Electrophoretic Black (EB)	Material: Space Aluminum, Stainless Steel Finish: Gold Plated (GP)	Material: Space Aluminum, Stainless Steel Finish: Satin Chrome (SC)	Material: Space Aluminum, Stainless Steel Finish: Antique Bronze	Material: Space Aluminum, Stainless Steel Finish: Antique Copper

Specifications	5 Inch	6 Inch
Model: HY-Q Series	HY-Q - 535	HY-Q - 635
Max Load Capacity	≤30kg/pcs	≤40kg/pcs
Applicable Door Width	≤1050mm	≤1200mm
Service Life	More than 300,000 cycles	More than 500,000 cycles
Overall Dimensions	148x100xΦ26 Leaf: 67.5x36x3.5mm	170x101xΦ28 Leaf: 78x36x3.5mm
Grooving Method	Groove-free	
Opening Direction	Single direction opening, max opening angle 170°, left-hand and right-hand mounting options available	
Operating Temperature	Temperature range: -30℃ ~ 60℃	
Applicable Door Types	Fire doors, wooden doors,aluminum alloy doors—interior doors for hotels, KTVs offices, and homes.	
Notes	Stainless steel hinge leaf thickness: 3mm	
Speed Control	Infinitely adjustable closing force; switchable silent & latching-on functions	
Functions	Hydraulic damping with three-speed cushioning that absorbs impact. Optional free-stop positioning at any angle beyond 90°, and optional 180° fully automatic closing function	

- ① Position-Hold & Latching
- ② Position-Hold & Soft close
- ③ Self-Closing & Latching
- ④ Self-Closing & Soft close



Installation Position



Exquisite Craftsmanship



Precision Structure



Convenient Installation



Strong Load-bearing



Soft Close

Square inch carries thousands of
daily openings and closings
hardware hydraulic hinges silently
guard the home's tranquility

Side-Hung Silent Hydraulic Hinge Series



HY-E Butt Type Silent Hydraulic Hinge - Brushed Natural (BN)
Material: SUS304 Stainless Steel
Finish: Brushed Natural (BN)



HY-E Butt Type Silent Hydraulic Hinge - Electrophoretic Black (EB)
Material: Space Aluminum, Stainless Steel
Finish: Electrophoretic Black (EB)



HY-E Butt Type Silent Hydraulic Hinge - Gold Plated (GP)
Material: Space Aluminum, Stainless Steel
Finish: Gold Plated (GP)



HY-E Butt Type Silent Hydraulic Hinge - Satin Chrome (SC)
Material: Space Aluminum, Stainless Steel
Finish: Satin Chrome (SC)



HY-E Butt Type Silent Hydraulic Hinge - Antique Bronze
Material: Space Aluminum, Stainless Steel
Finish: Antique Bronze



HY-E Butt Type Silent Hydraulic Hinge - Antique Copper
Material: Space Aluminum, Stainless Steel
Finish: Antique Copper


Key Features

Specifications	4 Inch	5 Inch	6 Inch
Model: HY-E Series	HY-E-435	HY-E-535	HY-E-635
Max Load Capacity	≤20kg/pcs	≤30kg/pcs	≤40kg/pcs
Applicable Door Width	≤900mm	≤1050mm	≤1200mm
Service Life	More than 300,000 cycles	More than 300,000 cycles	More than 500,000 cycles
Overall Dimensions	141x88xΦ22.5 Leaf: 130x30x3.5mm	148x100xΦ26 Leaf: 138x36x3.5mm	170x101xΦ28 Leaf: 160x36x3.5mm
Grooving Method	Grooving width: 35±0.5-0mm, single-side grooving depth: 4 mm		
Opening Direction	Single-direction opening, max. opening angle 170°, left-hand and right-hand mounting options available.		
Operating Temperature	Temperature range: -30℃ ~ 60℃		
Applicable Door Types	Fire doors, wooden doors, aluminum alloy doors—interior doors for hotels, KTVs offices, and homes.		
Notes	Stainless steel hinge leaf thickness: 3mm		
Speed Control	Infinitely adjustable closing force; switchable silent & latching-on functions		
Functions	Hydraulic damping with three-speed cushioning that absorbs impact. Optional free-stop positioning at any angle beyond 90°, and optional 180° fully automatic closing function		

Optional Functions

- ① Position-Hold & Latching
- ② Position-Hold & Soft close
- ③ Self-Closing & Latching
- ④ Self-Closing & Soft close

Installation Position

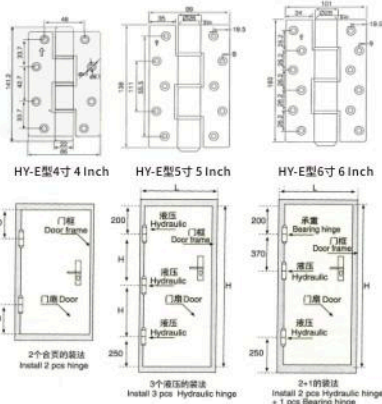

One soft push one whisper-quiet close
silent hydraulic hinges for side-hung doors
keep your home in serene quiet



Exquisite Craftsmanship



Precision Structure



Convenient Installation



Strong Load-bearing




Soft Close

General Stainless Steel Hinge Series

Other Types (General-Purpose Series): Flag Hinge, H Hinge, L Hinge, Spring Hinge

Butterfly Hinge

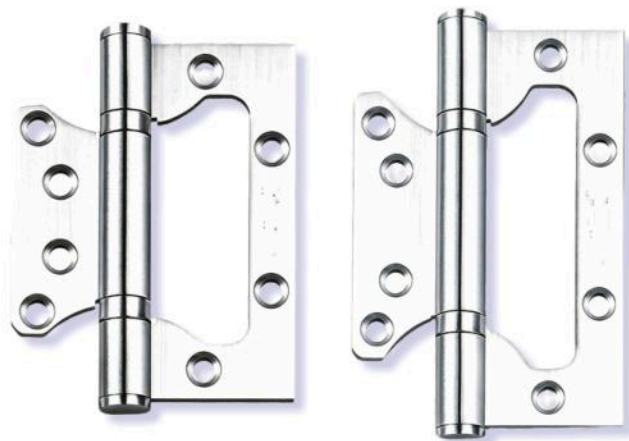

Available Finishes

- ※ Material: 304 / 201 Stainless Steel
- ※ Load-bearing Capacity: 45kg / 2 pcs
- ※ Applicable Door Thickness: 35mm and above
- ※ Application: Various Wooden Doors
- ※ Process Features: Smooth&Soft-close
- ※ Ball Bearings

Color Options



※ Color: Brushed SS / Gold SB/Black BK / Gun-grey GY/Brass Antique CF
Copper Antique AC / Bronze Antique AB

Model	Material	Bearing	Specification
HY-412	SS304/SS201	2BB	Φ12-100X70X2.0mm
HY-413	SS304/SS201	2BB	Φ13-100X73X2.5mm
HY-414	SS304/SS201	2BB	Φ13-100X73X2.5mm
HY-4145	SS304/SS201	2BB	Φ14.5-100X75X3.0mm
HY-512	SS304/SS201	2BB	Φ12-125X70X2.0mm
HY-514	SS304/SS201	2BB	Φ14-125X75X2.8mm
HY-5145	SS304/SS201	2BB	Φ14.5-125X75X3.0mm

Butt Hinge



Available Finishes

- ※ Material: 304 / 201 Stainless Steel
- ※ Load-bearing Capacity: 45kg / 2 pcs
- ※ Applicable Door Thickness: 35mm and above
- ※ Suitable for: Various wooden doors
- ※ Process Features: Smooth&Soft-close
- ※ Ball Bearings

Color Options



※ Color: Brushed SS / Gold SB/Black BK / Gun-grey GY/Brass Antique CF
Copper Antique AC / Bronze Antique AB

Model	Material	Bearing	Specification
HY-433-2BB	SS304/SS201	2BB	Φ14.2-4"x3"x3.0mm
HY-433R-2BB	SS304/SS201	2BB	Φ14.2-4"x3"x3.0mm
HY-433-4BB	SS304/SS201	2BB	Φ14.2-4"x3"x3.0mm

Refined-within Simple-without


Curated Materials

Precision Engineered


Made to Stay New

Anti-corrosion & rust-proof

Whisper-Quiet Motion

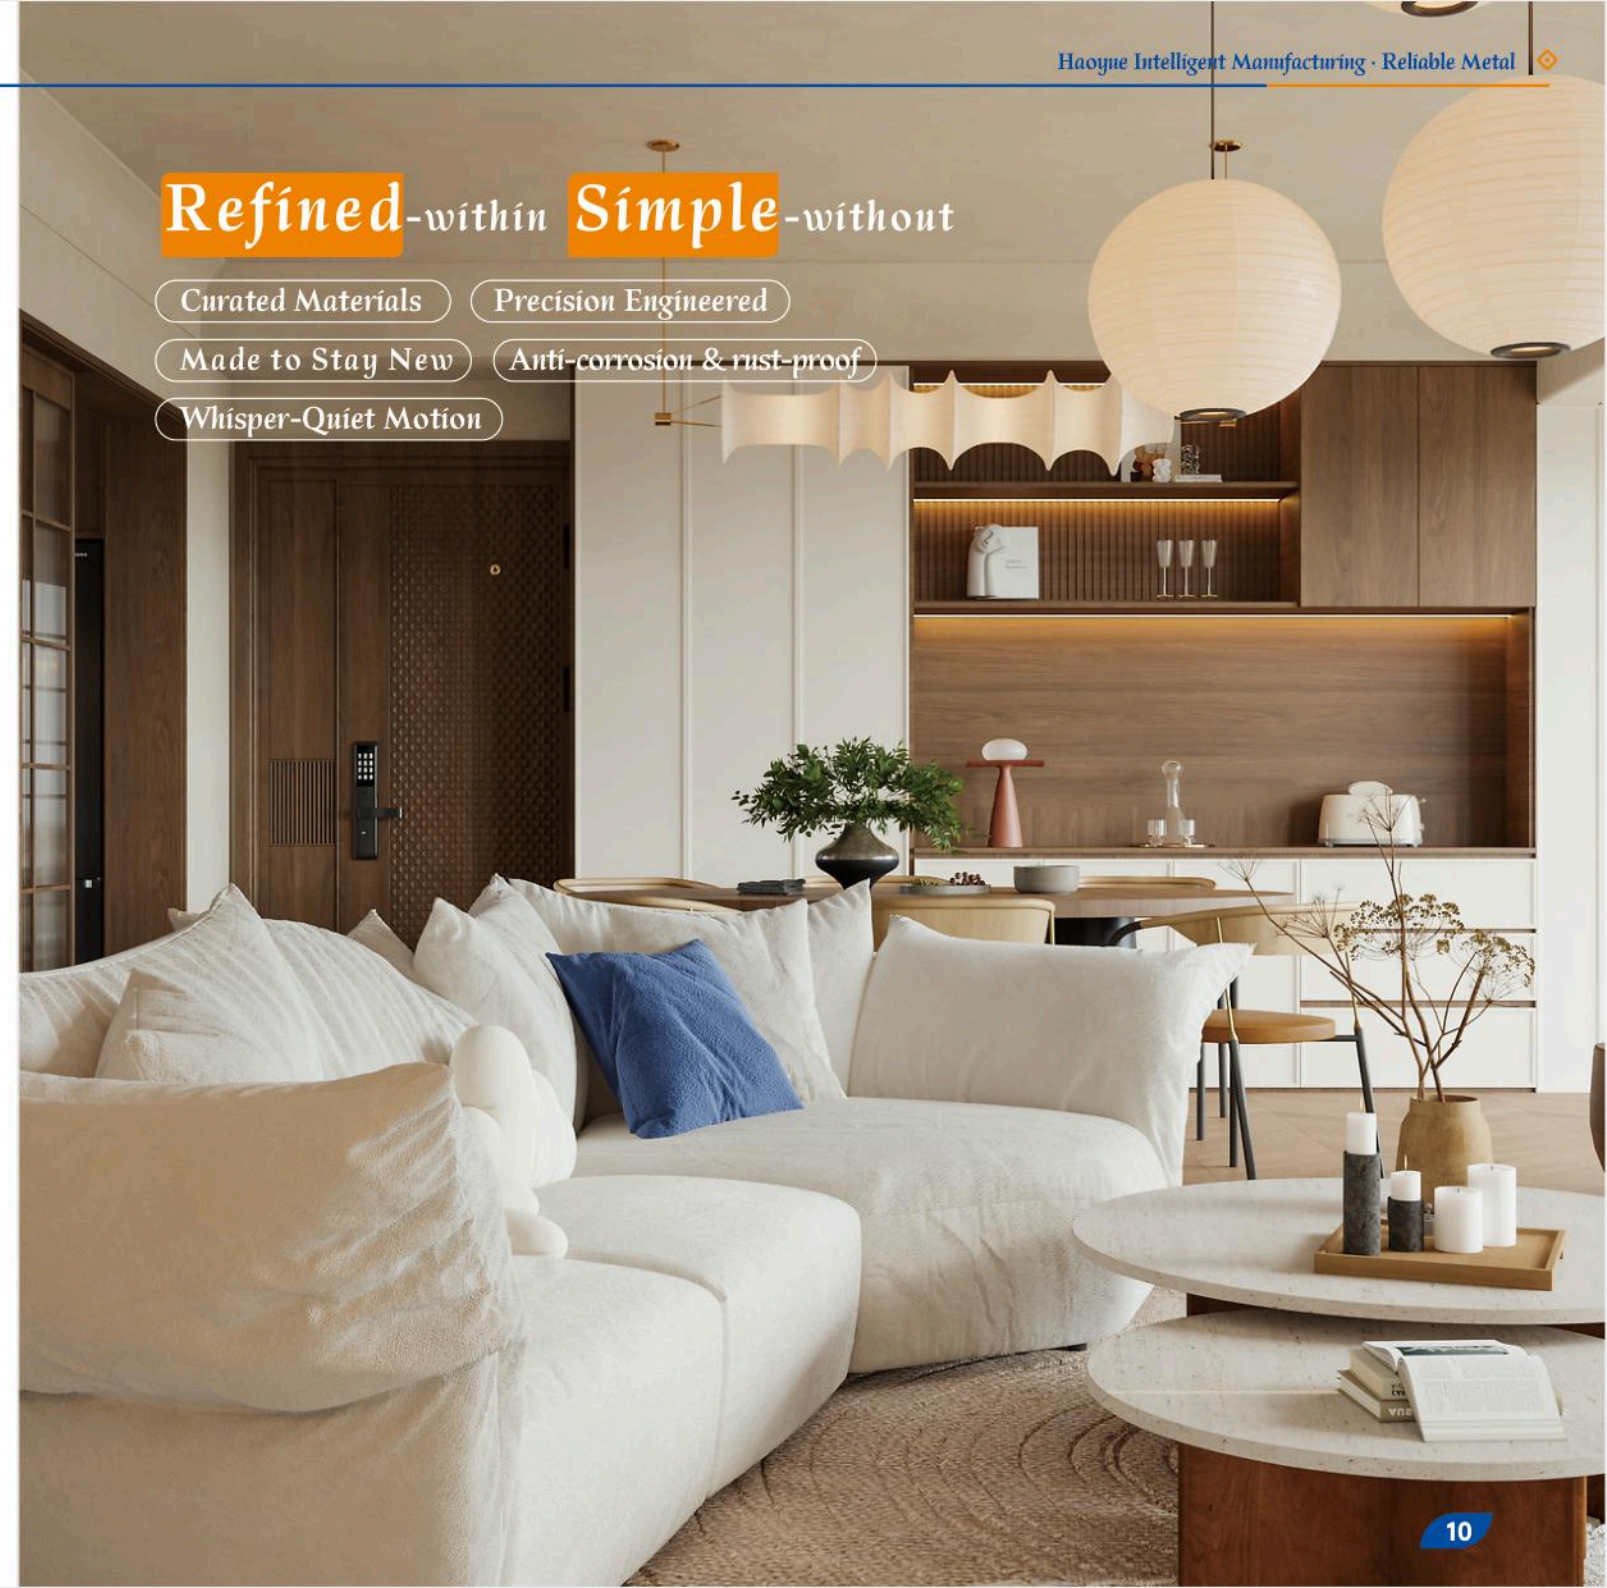


Oiled & Oil-Free Hinge Series

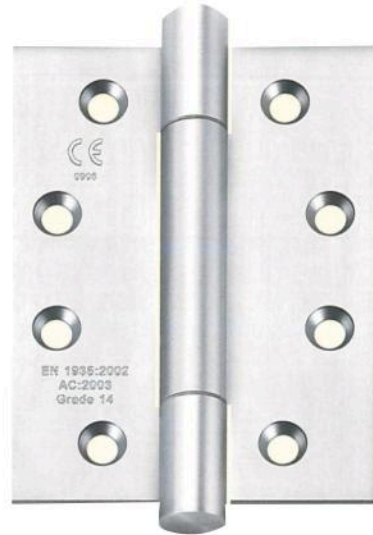

Silky-Smooth, Friction-Free
Whisper-Quiet Swings

Model	Material	Specification
HY-433	SS304/SS201	Φ14-4"x3"x3.0mm
HY-4353	SS304/SS201	Φ14-4"x3.5"x3.0mm
HY-4353	SS304/SS201	Φ14-4"x4"x3.0mm
HY-4543	SS304/SS201	Φ14-4.5"x4"x3.0mm
HY-533	SS304/SS201	Φ14-5"x3"x3.0mm
HY-5353	SS304/SS201	Φ14-5"x3.5"x3.0mm

Oiled&Oil-free Butterfly Hinges

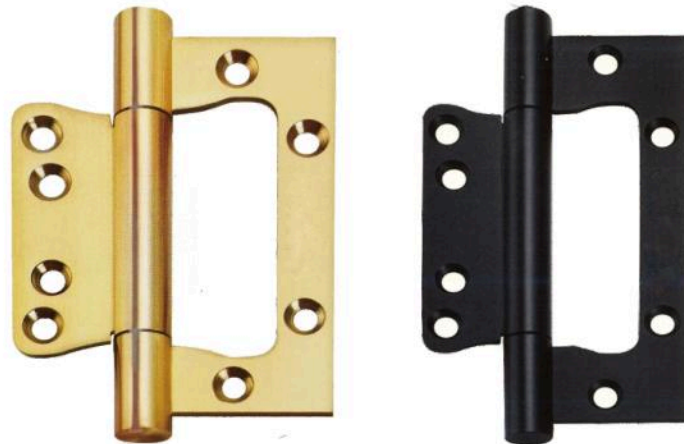


Silence from open to close
Experience lies in the details

- Smooth, Damped Motion
- Noise-Free & Quiet
- Clean, Oil-Free
- Built to Last

Other Types: Flag Hinge, H Hinge, L Hinge, Spring Hinge

Oiled&Oil-free Butt Hinge Series

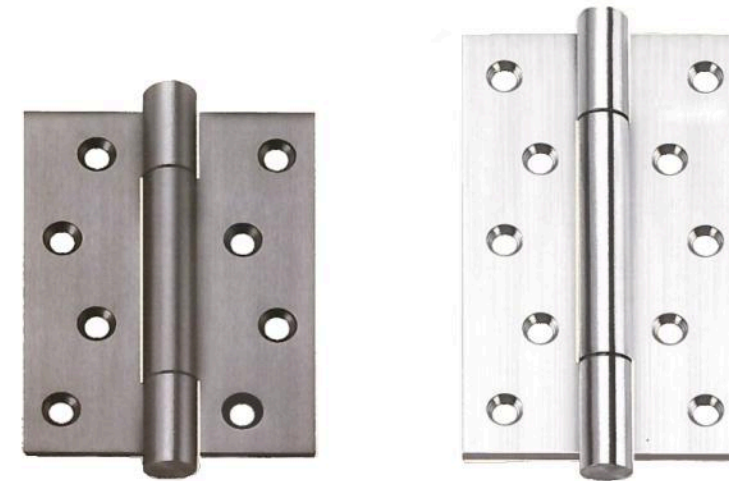

Available Finishes

- ※ Material: 304 / 201 Stainless Steel
- ※ Load-bearing Capacity: 160kg / 2 pcs
- ※ Applicable Door Thickness: 35mm and above
- ※ Suitable for: All types of wooden doors
- ※ Product Highlights: High load-bearing, precise & smooth operation, quiet performance

Color Options

Color: Brushed SS, Gold SB, Black BK, Gun-metal GY



Non-Standard Custom Oiled & Oil-Free Series



- ※ Precision-manufactured with all-new oil-free technology
- ※ Hardened washers
- ※ Load capacity: up to 160 kg
- ※ 200,000+ open/close cycles
- ※ All-new structure for stronger
- ※ more reliable hinge performance

HY-L Type-Industrial / Heavy-Duty



ROCK-SOLID BUILT FOR GRAND RESIDENCES

- ◆ Thickened, Reinforced Base
- ◆ Built for Heavy Loads
- ◆ Silky-Smooth & Silent
- ◆ Industrial-Grade Precision

HY-T Type- Spring / Self-Closing



Smart Auto-Return smooth Effortless Open & Close

- ◆ Heavy-Duty Spring
- ◆ Automatic Self-Closing
- ◆ Easy Installation
- ◆ Adjustable Closing Force

Model HY-H Hinge



Premium 304 Stainless Steel

- ◆ High Load Capacity
- ◆ Corrosion-Resistant
- ◆ Long-Lasting Durability
- ◆ Precision H-Design



The Complete Haoyue Range Hinges For Every Door Every Space

Full Specifications Available

Customized from Your 3D Model

High-Grade Materials

Rapid Installation

Slide & Rail Series



Drawer Slides, Guide Rails, Hardware Accessories, Soft-close Slide Assemblies



Modern Soft-close Drawer Slides



Modern Slides



Guide Rails Soft-close Drawer Slides




Hardware Slides



Silent Double-way Soft-close Hanging Roller Tracks

Every Push And Pull **Silky Smooth**

Smooth · Quiet · Heavy-duty · Durable

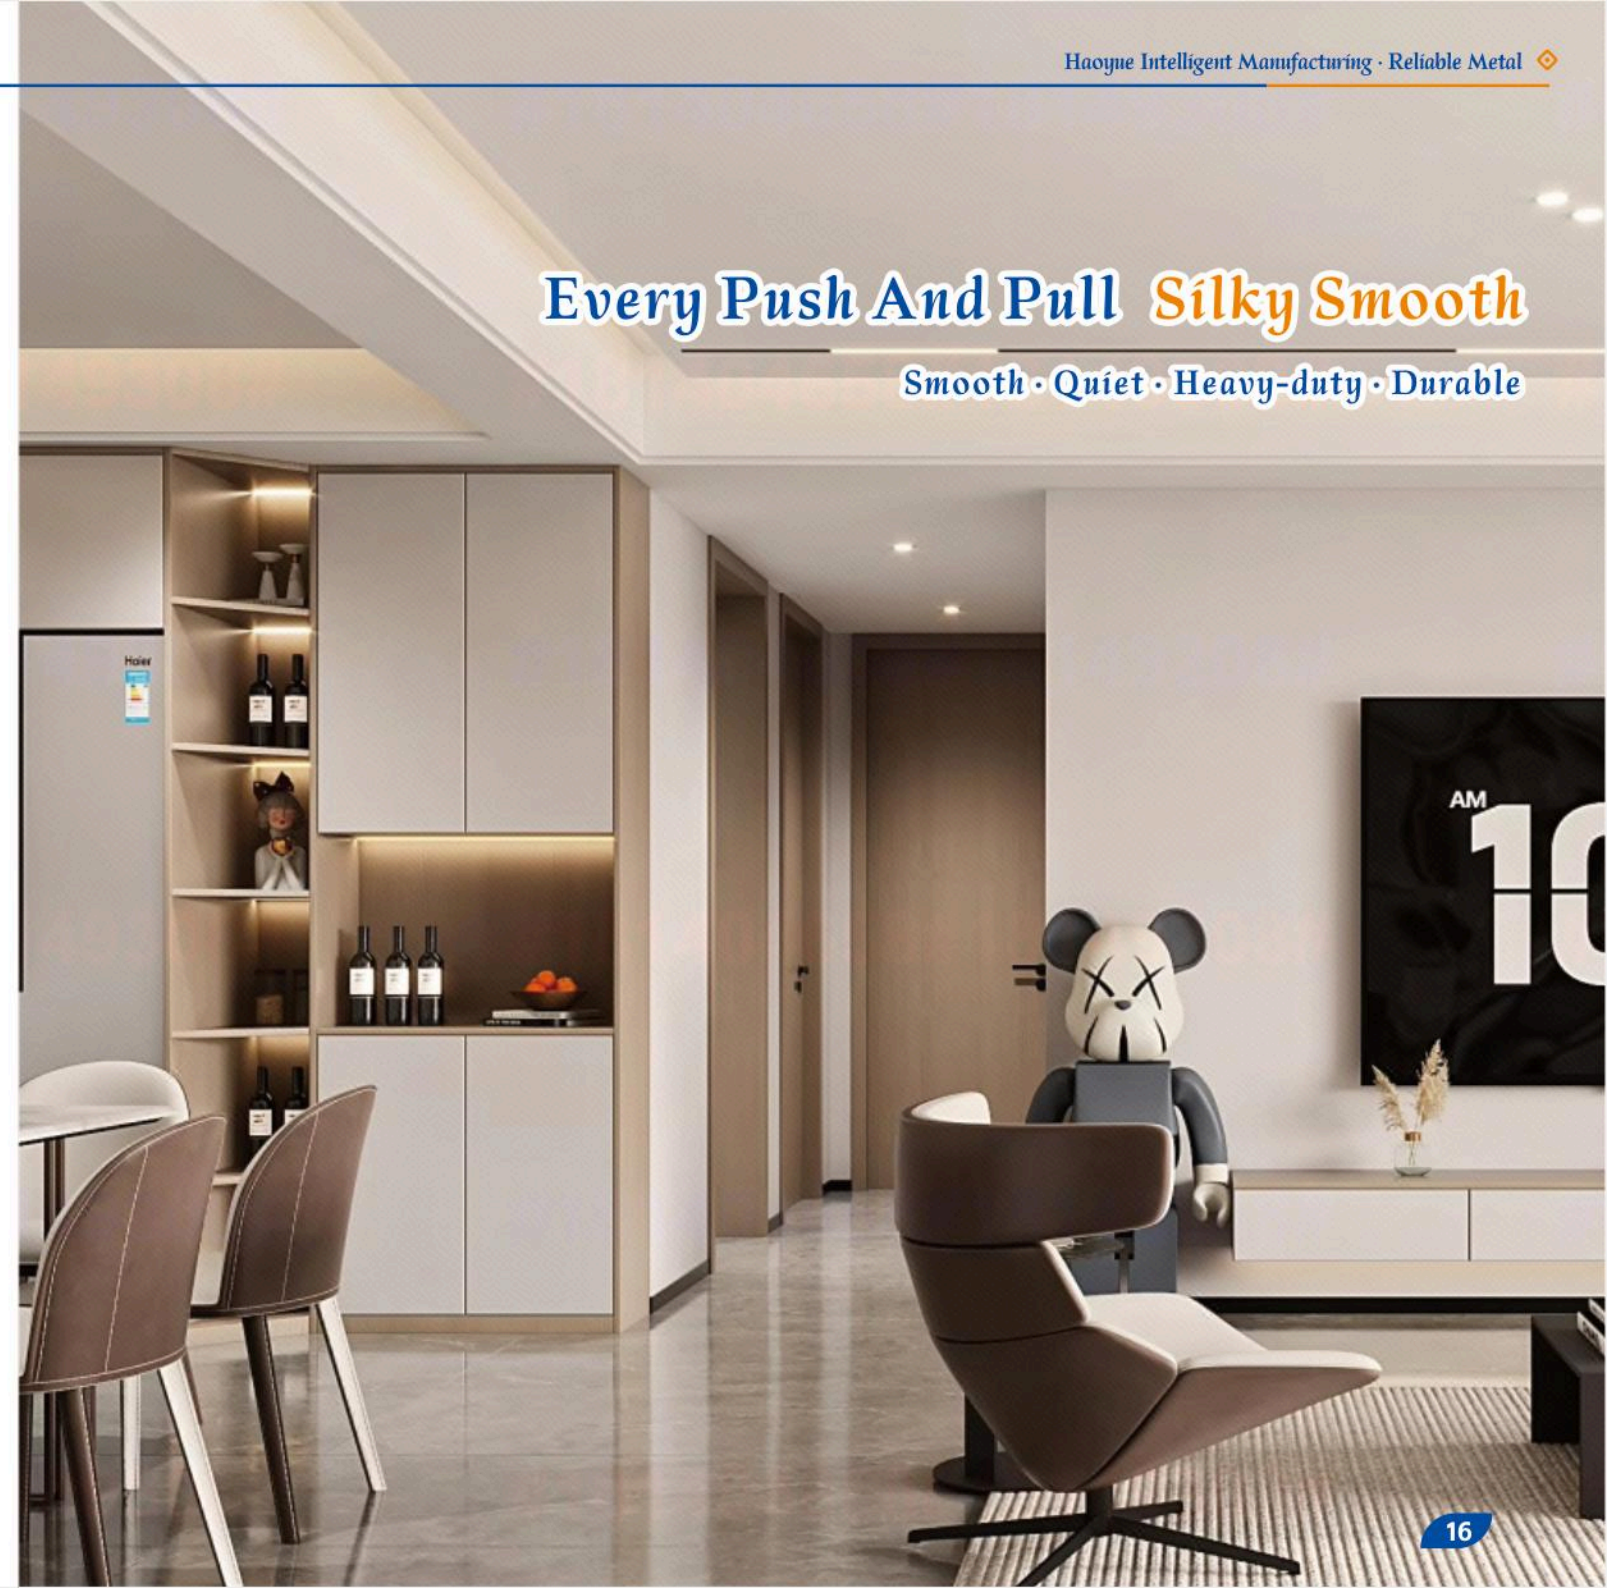

Cabinet Hinge Series



Multi-function Soft-close
Hinge Silent Damping
Effortless Close

- ✓ Silent Soft Close
- ✓ Strong Load Capacity
- ✓ Precision-Built & Durable
- ✓ Easy Installation



Damping Cushioning
Quiet & Enjoyable Open-Close
Comfortable Living

Hydraulic Damping | Soft & Gentle Rebound | Powerful Spring | Smooth & Silent



Cabinet Hinge Series



Modern Hinges, Hinge Hardware Accessories




Concealed Wardrobe Cabinet Hinges



Modern Door Butt Hinges, Stainless Steel Butt Hinges, Ball-Bearing Hinges, Metal Butt Hinges



Door Butt Hinges Stainless Steel Butt Hinges Ball-Bearing Hinges Metal Butt Hinges

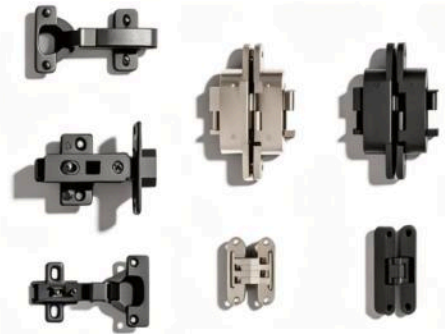

Modern Hinges, Door Hardware, Butt Hinges



Butt Hinges, Hinges, Door Hinges, Concealed Cabinet Hinges, Cabinet Hardware

Custom Solid Brass Series

Classic Solid Brass Hinge



- ✓ Premium Materials
- ✓ Smooth Operation
- ✓ Corrosion-Resistant
- ✓ For Architectural Projects

- ✓ Precision Bearings
- ✓ Solid Brass Construction
- ✓ Long-Lasting Durability
- ✓ Rust & Corrosion Resistant



Strength & Refinement
for Every Space

Custom (Non-Standard) Series



Custom Automatic Self-Closing Spring Hinge



Strong Rebound, High Adaptability, Fits Special Doors, Windows & Cabinets

- Worry-Free Open & Close
- Automatic Self-Closing
- Quality-Assured Load Capacity
- Gap-Free, Snug Closure
- Sturdy & Durable
- Non-Standard Customizable
- Custom Spring Hinges for Diverse Applications

Tallored for You

- One-stop Service
- Professional Solutions
- Free Sampling
- Stable Supply

